LECTURE 22

NUMPY

MCS 275 Spring 2023
Emily Dumas

LECTURE 22: NUMPY

Reminders and announcements:

- Project 3 available; due 6pm on Fri Mar 17.

- Install Pillow now (if possible) to make lab this week smoother.

- I will be out of work on Fri Mar 10, and will post an asynchronous lecture video in place of our usual meeting that day.

A GOOD BOOK

For numpy, matplotlib, and a few other topics from MCS 275, I strongly recommend reading:

- *Python Data Science Handbook* by Jake VanderPlas

It is available for free online. Chapter 2 is about numpy.

INSTALLING NUMPY

In most cases, pip is all you need:

```
python3 -m pip install numpy
```

Other methods are described in the Numpy docs.

Test:

```
>>> import numpy
>>> numpy.__version__
'1.17.4'
```

IMPORT AS

You can give a module a new name at import time, e.g.

```
import math as sun
sun.tan(0.5)
```

Since numpy has a lot of global names, most people import it under a shorter name to save typing:

```
import numpy as np
```

NUMPY PURPOSE

- Fast, type-homogeneous, multidimensional arrays
  - e.g. vector, matrix, tensor, ...
- Large library of mathematical functions and algorithms (especially linear algebra)

Numpy is one of the most-used Python packages in scientific computing (computational math, data science, machine learning, ...).
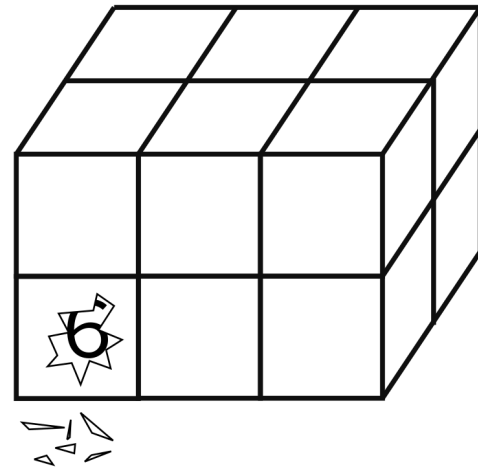
ARRAYS

1-dimensional array of shape (7,)

2	7	5	2	0	2	1

2-dimensional array of shape (2,4)

2	7	5	0
4	8	1	1

3-dimensional array of shape (2,2,3)

Implemented in `np.ndarray` class, usually made with `np.array`.

Without numpy:

```
v = [2,3]
w = [3,-2]
v + w      # [2,3,3,-2]
3*v        # [2,3,2,3,2,3]
v.dot(w) # fail!
A = [ [2,1], [1,1] ]
type(A)    # list
A*v        # fail!
```

With numpy:

```
v = np.array([2,3])
w = np.array([3,-2])
v + w     # [5,1]
3*v       # [6,9]
v.dot(w) # 0
A = np.array([ [2,1], [1,1] ])
A*v       # possibly confusing answer
A.dot(v) # [7,5] (matrix-vector mult)
```

NOTEBOOK TIME

I'll build a Python notebook demonstrating some basic features of numpy.

After lecture it will be in the course sample code repo.

INDEXING AND SLICING

Numpy has powerful syntax for retrieving individual elements or collections of elements of arrays.

Most basic version: `A[i,j]` gives the element at row `i`, column `j` for a 2D array. Similar in higher dimensions, e.g. `A[i,j,k,l]`.

Slices return *views* of part of the array, not copies.

UFUNCS

Numpy's "ufuncs" or **universal functions** are functions that can be applied directly to arrays, automatically acting on each element.

Numpy provides a *lot* of these.

Usually, ufuncs allow you to avoid explicit iteration over array elements (which is much slower).

BOOL GOTCHA

```
np.array([5,0,1])==np.array([0,0,0])
```

evaluates to

```
np.array([False,True,False])
```

and numpy arrays *do not support boolean coercion* so this cannot appear in `if`.

To test if two arrays are equal, use one of:

```
np.all(A==B)
np.array_equal(A,B)
```

AGGREGATIONS

Numpy has operations like sum, product, max, min, all, any, that reduce array dimension.

REFERENCES

- *Python Data Science Handbook* by Jake VanderPlas
  - Bookmark it now! We'll use it for several topics.
  - Chapter 2 contains the introduction to numpy.
  - There is also a print edition from O'Reilly.

REVISION HISTORY

- 2022-03-09 Last year's lecture on this topic finalized
- 2023-03-05 Updated for 2023